




Extruded Dock Bumpers

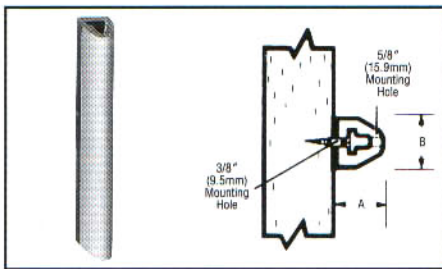


Model D-2

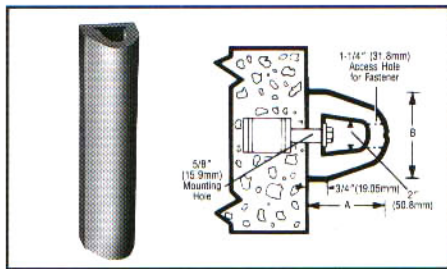

Model D-4

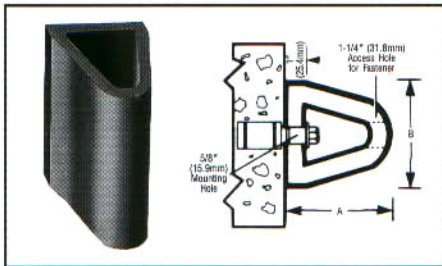

Model D-6

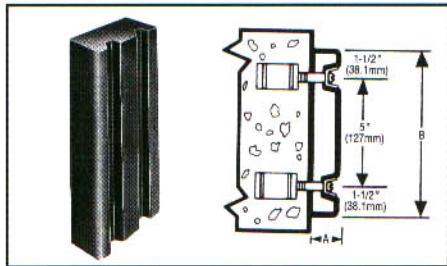


Model E


Model	A Thickness	B Width	C Length	Bolt Size	Wt. lbs.	Color
D-2	1 3/4" (44.5mm)	2" (50.8mm)	Up to 10' (3048mm)	1/4"x2" (6.4mmx50.8mm)	1.4lbs/ft (0.64kg/304.8mm)	Black
D-4	4" (101.6mm)	4 1/4" (108mm)	Up to 10' (3048mm)	1/2"x3" (12.7mmx76.2mm)	3.0lbs/ft (1.36kg/304.8mm)	Black
D-6	6" (152.4mm)	6" (152.4mm)	Up to 10' (3048mm)	1/2"x3" (12.7mmx76.2mm)	8.5lbs/ft (3.86kg/304.8mm)	Black
E	1 1/2" (38.1mm)	8" (203.2mm)	Up to 10' (3048mm)	3/8"x3 3/4" (9.5mmx95.3mm)	6.5lbs/ft (2.95kg/304.8mm)	Black

NOTE: Limited availability in yellow and gray. Call for information.


Wheel Chocks

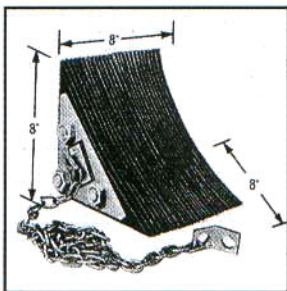

Model 88-8

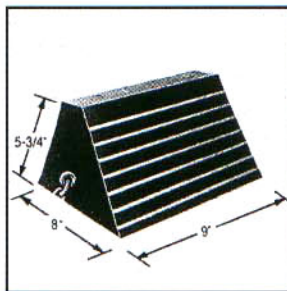

Model 68-9

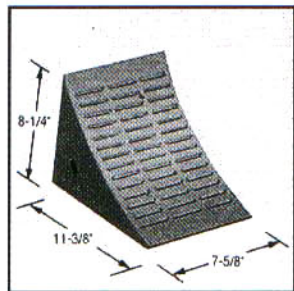

Model 811-7



Model SC-8



OSHA SPECIFIES:
1910.178 (k) Trucks and rail-road cars. (1) The brakes of highway trucks shall be set and wheel chocks placed under the rear wheels to prevent the trucks from rolling while they are boarded with powered industrial trucks.

Model	A Width	B Height	C Length	Weight lbs.	Color
88-8	8" (203.2mm)	8" (203.2mm)	8" (203.2mm)	15 (6.80kg)	Black
68-9	8" (203.2mm)	5 3/4" (146mm)	9" (228.6mm)	9 (4.08kg)	Black
811-7	11 3/8" (288.9mm)	8 1/4" (209.6mm)	7 5/8" (193.7mm)	6 1/2 (2.95kg)	Orange
SC-8	11 5/8" (295.3mm)	8" (203.2mm)	7" (177.8mm)	6 1/4 (2.83kg)	Aluminum

NOTE: Custom extruded chocks and wedges available upon request.